


Borede-stålrørspeler med spuntlås

Alle kapasiteter er veiledende.

Korrosjon, effekt av evt. utstøping etc. må vurderes særskilt

Rørene kan leveres i ulike stålqualiteter.

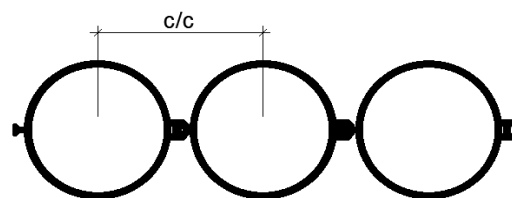

Profil	Dimensjoner		Senter avstand c/c [mm]	Stålareal mm ²	Vekt rør kg/m	W _{el} [cm ³ /m]	EI [kNm ² /m]
	Ø mm	t mm					
Ø220x10	219,1	10,0	283,0	6569	51,6	1 160	26 693
Ø220x12,5	219,1	12,5	283,0	8113	63,7	1 401	32 228
Ø273x10	273,0	10,0	337,0	8262	64,9	1 555	44 580
Ø273x12,5	273,0	12,5	337,0	10230	80,3	1 891	54 198
Ø323,9x10	323,9	10,0	388,0	9861	77,4	1 935	65 822
Ø323,9x12,5	323,9	12,5	388,0	12229	96,0	2 363	80 376
Ø406,4x10	406,4	10,0	470,0	12453	97,8	2 561	109 267
Ø406,4x12,5	406,4	12,5	470,0	15468	121,4	3 142	134 065
Ø508x12,5	508,0	12,5	572,0	19458	152,7	4 113	219 382
Ø508x14,2	508,0	14,2	572,0	22029	172,9	4 625	246 708
Ø610x12,5	610,0	12,5	674,0	23464	184,2	5 096	326 387
Ø610x16	610,0	16,0	674,0	29858	234,4	6 411	410 595
Ø711x16	711,0	16,0	775,0	34935	274,2	7 660	571 850
Ø813x16	813,0	16,0	877,0	40062	314,5	8 926	761 990
Ø914x16	914,0	16,0	978,0	45138	354,3	10 183	977 298